


Microprocessor based Dissolved Oxygen controller for DIN rail mounting with two programmable outputs.

## FEATURES

- Backlight LCD display
- Two on/off outputs
- Programmable delay at startup for probe polarization
- Programmable 0÷20mA output
- Stand-by for no flow interlock
- Easy user interface with navi-keys system
- Password protected settings
- Full scale accuracy: 1%

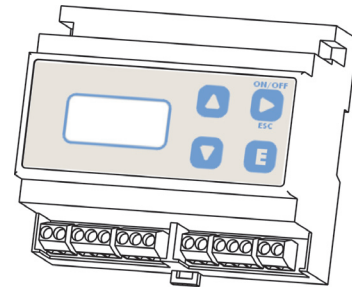

## CONFIGURATION CODE

Model O2DIN **0** **0**

ELECTRODES INPUT	
0	ECL13

## ELECTRICAL

### SIGNAL INPUT

With block connection

### ON/OFF OUTPUT

Free voltage contact

### POWER SUPPLY

24, 115, 230 VAC; 50/60 Hz

### CURRENT OUTPUT


Programmable 0÷20mA (max 350 Ohm) galvanic isolated

### POWER CONSUMPTION

Average 4 W

### INPUT

1 Flow sensor

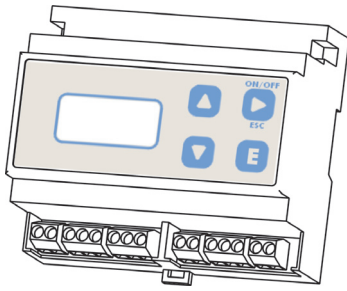

RAIL MOUNTING 6 MODULES

## ENCLOSURE


IP40 enclosure

## ENVIRONMENT

0°C ÷ 50°C (32°F ÷ 122°F)

0÷95% (non condensing) relative humidity

## "EASY-NAV" MENU

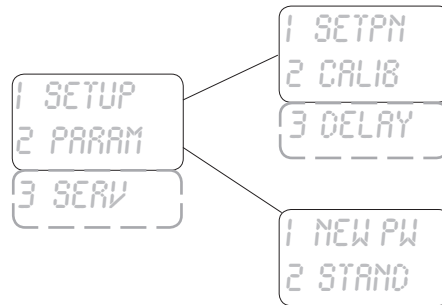

## AMPEROMETRIC CELLS

Amperometric cell	Measure for	Probe range (mg/l)	Instrument resolution
ECL 13	Dissolved oxygen	0-60 mg/l O <sub>2</sub>	0,1

Oxygen probes need a constant flow of water in, between 30 and 50 l/h, to work properly. Use PEF probe holders for optimal results.