


Microprocessor based temperature controller for DIN rail mounting with two programmable outputs.

FEATURES

- Backlight LCD display
- Two on/off outputs
- Programmable delay at startup for probe polarization
- Programmable 0÷20mA output
- Stand-by for no flow interlock
- Easy user interface with navi-keys system
- Password protected settings
- Full scale accuracy: 1%



CONFIGURATION CODE

Model TEMPDI 0 B 00 G 4 3 5 S 00

ELECTRICAL

SIGNAL INPUT

With block connection
Impedence > 10¹² Ω

POWER SUPPLY

24, 115, 230 VAC; 50/60 Hz

POWER CONSUMPTION

Average 4 W

ON/OFF OUTPUT


Free voltage contact

CURRENT OUTPUT

Programmable 0÷20mA (max 350 Ohm) galvanic isolated

INPUT

1 Flow sensor



RAIL MOUNTING 6 MODULES

ENCLOSURE


IP40 enclosure

ENVIRONMENT

0°C ÷ 50°C (32°F ÷ 122°F)

0÷95% (non condensing) relative humidity

"EASY-NAV" MENU

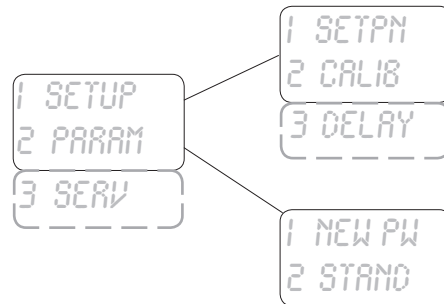

TEMPERATURE ELECTRODES

Electrode	Measure for	Probe range (mg/l)	Instrument resolution
ETEPCH18 ETEPCH18/L	TEMPERATURE	0-100°C	0,1